

## Fresa a finire registrabile per squadratrici

*Adjustable jointing cutter for double end tenoners machine*




DIA=5 mm

ØD	S	Z	Foro	Codice
200	26÷38	12+12	35+2CH	<b>AS10.38.35.05</b>
200	34÷46	12+18	35+2CH	<b>AS10.46.35.05</b>
200	44÷56	12+24	35+2CH	<b>AS10.56.35.05</b>
200	26÷38	12+12	40+2CH	<b>AS10.38.40.05</b>
200	34÷46	12+18	40+2CH	<b>AS10.46.40.05</b>
200	44÷56	12+24	40+2CH	<b>AS10.56.40.05</b>

DIA=2.5 mm

200	26÷38	12+12	35+2CH	<b>AS10.38.35.25</b>
200	34÷46	12+18	35+2CH	<b>AS10.46.35.25</b>
200	44÷56	12+24	35+2CH	<b>AS10.56.35.25</b>
200	26÷38	12+12	40+2CH	<b>AS10.38.40.25</b>
200	34÷46	12+18	40+2CH	<b>AS10.46.40.25</b>
200	44÷56	12+24	40+2CH	<b>AS10.56.40.25</b>

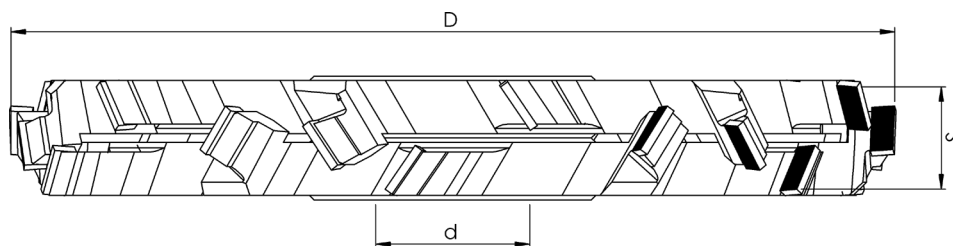

### Caratteristiche

Fresa registrabile a finire per macchine squadratrici.

### Characteristics

Adjustable jointing cutter for double end tenoners machine.